



## *PALMA*

*Refrigerators and Freezers. Ready-to-use.*



*Functional and efficient.*



## The functional all-rounder with minimum space requirements.

PALMA, the innovative "sales promoter", is optimally accessible from all sides and makes it possible to have an outstanding view into the unit. A strong, clear design and the absolutely efficient functionality make it into the perfect all-round unit for attractive product presentation.

### Your benefits

- High energy savings compared to conventional integrated systems
- Low investment and operating costs
- More efficiency through new low-energy fans:  
0.5 kWh energy savings daily
- Ecologically safe due to the natural refrigerant propane\*\*
- Completely CFC and FC-free
- Ready to use without any additional installation work
- Easy to access and look into from all sides
- Assured product quality through a constant interior temperature with high power reserves
- The refrigeration system is maintenance free
- Ideal for connecting in series
- Low space requirements - also perfectly suited to small formats

### Optional



- Brilliant LED interior lighting for an even more attractive product presentation



### Temperature ranges

- Refrigeration: +3 °C to +15 °C\*
- Deep freezing: -18 °C to -23 °C
- Meat and ground meat refrigeration: 0 °C to +2 °C\*

### Possible arrangements

- Standalone unit 
- Row arrangement 

### Accessories\*

- Partition wall grid with su grating for sales-promoting presentation
- Upright baskets for improved storage possibilities
- Impact protection strips available in various colours
- Water protection strips prevent water from penetrating under the unit

\*Permanently pre-set to +4 °C. Changes are possible by the service technician.  
\*\*available soon.

\* Ask for our accessories




*Semi-automatic defrosting of unit – a perfect system! (AD)*

Regular defrosting ...



... with a constant product temperature!

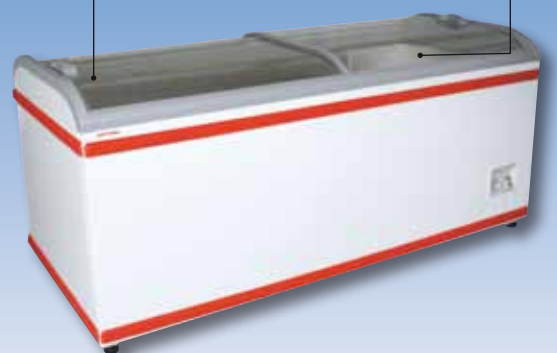

**Optional**

- Low-energy fans
- LED light

Supporting product

ed product

available in

prevent dust and for the unit

folder.

		<b>PALMA 185</b>
<b>Technical data</b>		(-)
Gross content	Litres	775
Net content according to EN 23953	Litres	625
Product presentation area (TDA)	m <sup>2</sup>	1,13
Classification according to EN 23953		3L1
Ambient temperature range	°C	+16 to +25
Controlling range of interior temperature	°C	-18 to -23
Sound pressure at a distance of 1 m	dB(A)	43,8
<b>Electrical Ratings</b>		
Rated voltage/frequency	V/Hz	220-240/50
Rated power consumption	W	400
Rated current	A	2,6
Fuse protection	A	16
Energy consumption (at 25 °C)	kWh/24 h	5,1
Length of power cord	mm	1750
<b>Refrigeration Data</b>		
Refrigerant		R404A
Quantities of refrigerant	g	270
Max. certified operating pressure	bar	30
<b>Dimensions</b>		
Length, outside/inside	mm	1852 / 1720
Depth, outside/inside	mm	853 / 720
Access height front/outside height	mm	770 / 833
Inside height	mm	705
Stacking height	mm	550
<b>Weight</b>		
Net weight (without packaging, with process-related interior fittings )	kg	120
Gross weight (with packaging, with process-related interior fittings )	kg	130

